



Elcalor - Wassererwärmer emailliert

Stand-Wassererwärmer Whiteline S 150-500 Liter

S 152 / S 202

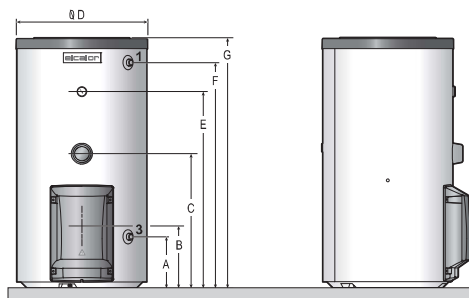

S 302 / S 403 / S 503

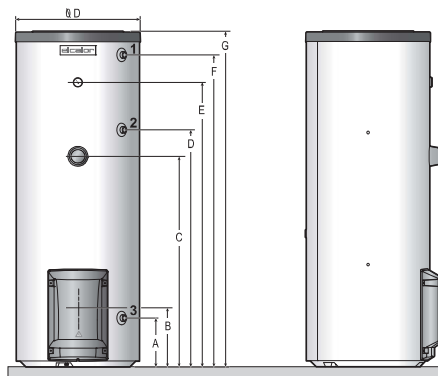

Typ		S	S	S	S	S
		152	202	302	403	503
Inhalt	l	150	200	300	400	500
Betriebsdruck	bar	10	10	10	10	10
Prüfdruck	bar	13	13	13	13	13
Gewicht ca.	kg	73	84	105	125	154
Abmessungen (mm)	Ø D	660	660	660	760	760
	G	988	1258	1778	1676	1916
	A	258	258	258	238	238
	B	366	366	366	358	358
	C	613	676	1116	1127	1127
	D	-	-	1256	1203	1203
	E	718	988	1508	1388	1628
	F	864	1134	1654	1540	1780
Kippmass	mm	1153	1390	1872	1820	2040
1 Austritt Warmwasser (AG)	WW / EC	R1"	R1"	R1"	R1"	R1¼"
2 Zirkulation (AG)	Z / Cir	-	-	R1"	R1"	R1"
3 Eintritt Kaltwasser (AG)	KW / EF	R1"	R1"	R1"	R1"	R1¼"

Leistungsdaten der Elektro-Heizeinsätze

Aufheizzeit	3h (60°C) / 4h (75°C)			4.5h (60°C) / 6h (75°C)			6h (60°C) / 8h (75°C)		
Modell	230V	400V	3x400V	230V	400V	3x400V	230V	400V	3x400V
S 152	-	3000W	3000W	2000W	2000W	2000W	2000W	2000W	-
S 202/SR 203	-	4000W	4000W	-	3000W	3000W	2000W	2000W	2000W
S 302/SR 303	-	-	6000W	-	4000W	4000W	-	3000W	3000W
S/SR 403	-	-	8000W	-	-	5333W	-	4000W	4000W
S/SR 503	-	-	10000W	-	-	6667W	-	-	5000W