


Elcalor - Wassererwärmer emailliert

Wand-Wassererwärmer Whiteline W 80-200 Liter

Wand-Wassererwärmer Serie W

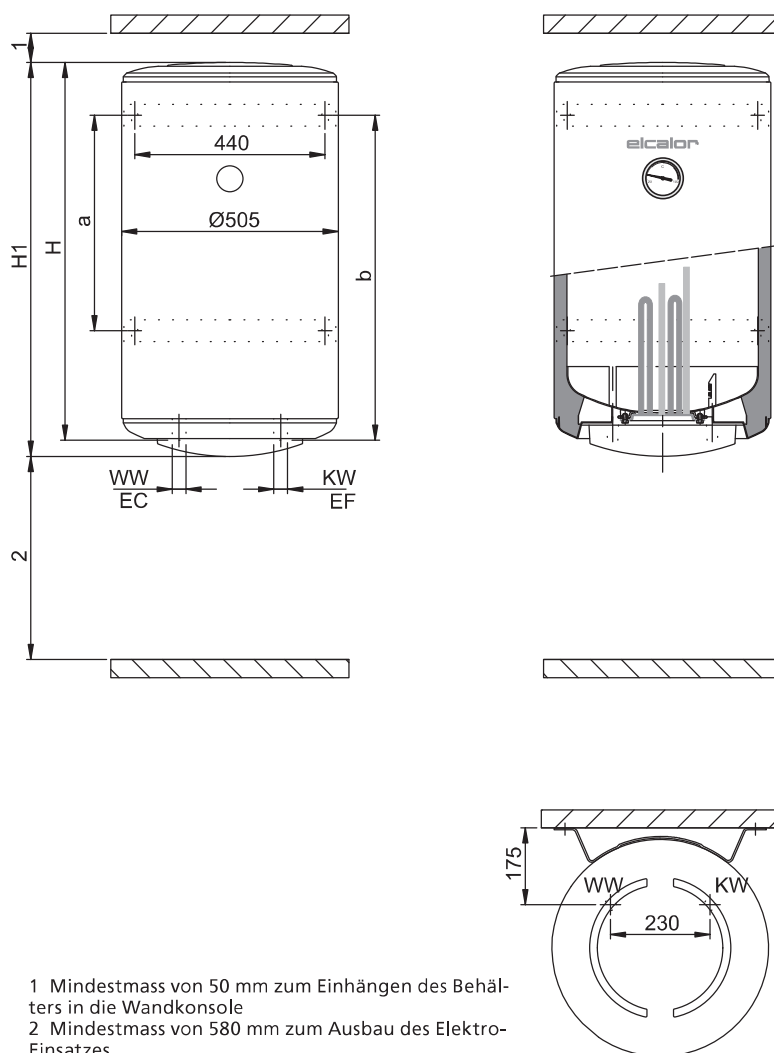

Typ		W	W	W	W	W
		80-1	100-1	120-1	150-1	200-1
Inhalt	l	75	100	120	150	200
Betriebsdruck	bar	6	6	6	6	6
Prüfdruck	bar	12	12	12	12	12
Gewicht ca.	kg	26	31	35	41	50
Abmessungen (mm)	a	-	-	498	798	798
	b	570	748	748	1048	1048
	H	690	861	993	1194	1521
	H1	742	908	1040	1241	1568
Eintritt Kaltwasser (AG)	KW	3/4"	3/4"	3/4"	3/4"	3/4"
Austritt Warmwasser (AG)	WW	3/4"	3/4"	3/4"	3/4"	3/4"

Leistungsdaten der Elektro-Heizeinsätze

Aufheizzeit	3h (60°C) / 4h (75°C)			4.5h (60°C) / 6h (75°C)			6h (60°C) / 8h (75°C)		
Modell	230V	400V	3x400V	230V	400V	3x400V	230V	400V	3x400V
W 80-1	1500W	1500W	-	1000W	1000W	-	750W	750W	-
W 100-1	2000W	2000W	-	1350W	1350W	-	1000W	1000W	-
W 120-1	-	2400W	-	1600W	1600W	-	1200W	1200W	-
W 150-1	-	3000W	-	2000W	2000W	-	1500W	1500W	-
W 200-1	-	-	4000W	-	3000W	-	2000W	2000W	-